


OPAL Pendant Luminaire deco



Various Colour With RAL Code

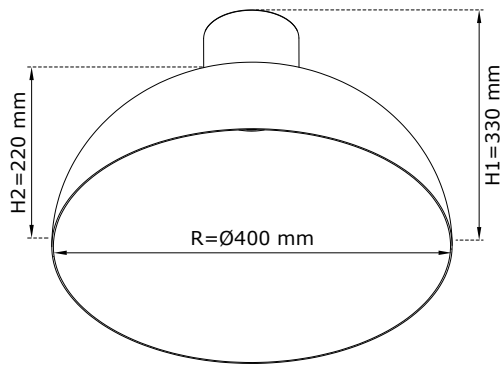

✓ Regular Feature

- Aluminium Plaster Luminaire
- Aluminium Injection Heatsink
- High Diffusion and Transmission Pyramid Surface Diffuser
- High Performance LED
- MacAdam 3 Steps Colour Tolerance
- High Power Factor, Low TDH Driver
- Halogen Free Cable

❓ Optional Feature

- Colour Option According RAL Code
- UGR < 19 Diffuser
- DDP and Other Diffuser Option
- Driver Brands on Demand
- DALI and Other DIM Driver Compatibility

Luminaire	
Rated Power	15W
Power Consumption	14W
Input Current	0.1A Max
Input Voltage	220-240 Vac
Luminaire Luminous Flux	1525 lm*
Luminaire Efficiency	~110 lm/W
CRI (Ra)	>80
Beam Angle	90°

Light Colour Options	
----------------------	--

* Luminous Flux Is Measured Armature Output Flux Based On Osram Duris E5 4000K

🎨 Regular Frame Colour

- Outer Surface • RAL 9005 Mat Black • RAL 7016 Mat Anthracite
 Inner Surface • RAL 9003 Mat White • Copper, Gold
 • Colour Option With RAL Code are Available

Driver **	
Power	15W
Output Voltage	25-40Vdc
Drive Current	350 mA
Power Factor (PF)	≥0.90
Efficiency	≥83
TDH	≤18
Surge Level	1 KV

** Table content given according Lifud Flicker-Free Driver.
 • Different driver brand can be used according project.

✓ Packing

Box Quantity: 1
 Box Weight : 3,50 kg

Standard Suspension Kit Length is 1.5mt.