



ORBIC V / Surface Mounted, Pendant Luminaire

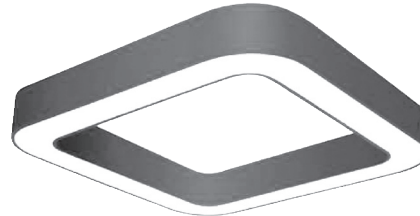

Various Colour With RAL Code

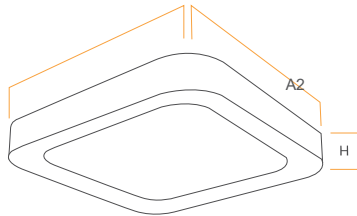

Regular Feature

- Metal Body
- High Diffusion And Transmission Diffuser
- MacAdam 3 Steps Colour Tolerance
- High Performance LED
- High Power Factor, Low TDH Driver

Optional Feature

- Colour Option According RAL Code
- DALI and Other DIM Driver Compatibility
- Emergency Kit
- Various Dimension According Project

Power	Luminaire Luminous Flux (lm)*	Luminaire Efficiency	CRI (Ra)	Beam Angle	Dimensions (mm)		
					A1	L1	H
50W	5250	~ 105lm/W	>80	120 °	900	900	80

Light Colour Options 2700K 3000K 4000K 6500K

* Efficiency based On 4000K Samsung 2835 LED.

- Standard Suspension Kit Length is 1.5mt.

Regular Frame Colour

- RAL 9003 Mat White
- RAL 9005 Mat Black
- Colour option with RAL code are available.

Turkey
Discover the potential

According Project ;
Luminaire

- Dimension and length,
- Power consumption per meter can change.
- Adjustable suspension kit and transparent cable will be used for pendant luminaire.

Please call for detail.

