



# ZEN M louvre

/ Linear Surface Mounted, Pendant Luminaire

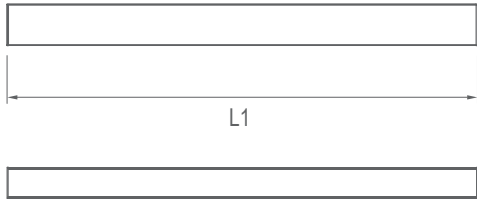

## ✓ Regular Feature

- Extruded Aluminium Body
- High Diffusion And Transmission Diffuser
- High Performance LED
- MacAdam 3 Steps Colour Tolerance
- High Power Factor, Low TDH Driver

## ❓ Optional Feature

- DALI and Other DIM Driver Compability
- Colour Option According RAL Code
- Emergency Kit

Power Consumption	Luminaire Luminous Flux (lm)*	Luminaire Efficiency	Input Voltage	CRI (Ra)	Output Voltage	Drive Current	Dimensions(mm)		
							L1	L2	H
50W	4400	~ 88lm/W	220-240 Vac	>80	144V	350 mA	1690	75	84

Light Colour Options



## Regular Frame Colour

- RAL 9003 Mat White
- RAL 7016 Mat Anthracite
- RAL 9006 Mat Grey
- RAL 9005 Mat Black
- Colour option with RAL code are available.
- Standard Suspension Kit Length is 1.5mt.

**Turkey**  
Discover the potential

