

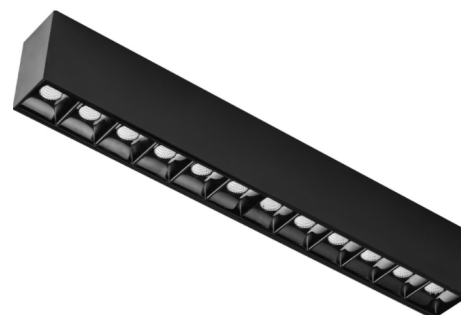


ZEN M-SPOT / Linear Surface Mounted, Pendant Luminaire



Various Colour With RAL Code

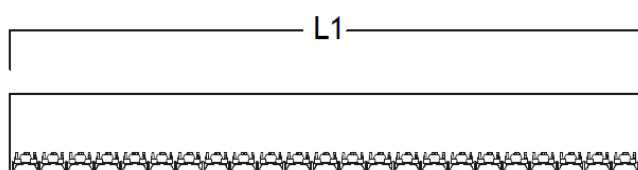

Regular Feature

- Extruded Aluminium Body
- MacAdam 3 Steps Colour Tolerance
- High Performance LED
- High Power Factor, Low TDH Driver
- High Efficient Reflector

Optional Feature

- Paint Option According RAL Code
- DALI and Other DIM Driver Compability
- Emergency Kit
- Driver Brands on Demand

Luminaire

Power Consumption	24 / 30 / 36 / 40 W/mt
Input Current	0,15
Input Voltage	220-240 Ac
Luminaire Efficiency	~ 120 lm/W*
CRI (Ra)	>80
Beam Angle	12° / 34° / 48°

* Lumen output edculated according Samsung LM3017+ 4000K and 350 mA.

Light Colour Options



- Standard Suspension Kit Length is 1.5mt.

According Project ;

- Lenght of luminaire (L1) can be increased every 80 and 132mm.

Sample lenght of luminaire 136mm, 268mm, 400mm, 480mm, 500mm, 611mm, 928mm, 1193mm, 1535mm...

- Power consumption per meter can change.
- Standart dimensions of profile (HxL2):70x33mm

Please call for details.

Regular Frame Colour

- RAL 9003 Mat White
- RAL 9005 Mat Black
- Colour option with RAL code are available.